


Rain shower for surface-mounted ceiling installation with light 300 x 240 mm - SERIES SPECIFIC
Chrome

28 042 980 Product version from 5/1/2022



- rain shower 300 x 240mm
- Rain shower material: metal
- PURE RAIN, max. flow rate 12 l/min (at 3 bar)
- PURIFY RAIN, max. flow rate 6 l/min (at 3 bar)
- with anti-scale system

Technical data:

- Distance to ceiling from bottom edge of shower 40 mm

Electric:

- Ceiling module power supply
- 350mA (CC)
- Spot lighting
- LED colour temperature approx. 3000 K
- Technology: LED, not dimmable
- Contains energy efficiency class bulbs
- Bulbs protected against splashing water
- Comply with the protection zone regulations as defined in DIN VDE 0100, Part 701 (IEC 60364-7-701).

Environment:

- Not suitable for use in a steam room.
- Not suitable for outdoor use.
- Not suitable for use in chlorinated or salty environments.

Planning tips:

- Provided by customer: Light switch
- For simultaneous control of the jet types, we recommend the xTool thermostat module

Notes:

	Chrome	28 042 980-00
	Brushed Platinum	28 042 980-06
	Platinum	28 042 980-08
	Brushed Durabronze (23kt Gold)	28 042 980-28
	Matte Black	28 042 980-33
	Brushed Gold (PVD)	28 042 980-37
	Brushed Dark Brass (PVD)	28 042 980-39
	Brushed Champagne (22kt Gold)	28 042 980-46
	Champagne (22kt Gold)	28 042 980-47
	Brushed Chrome	28 042 980-93
	Brushed Dark Platinum	28 042 980-99

Required miscellaneous




Concealed ceiling installation box 35 042 970 90 for surface-mounted ceiling installation with light -

- min. recess depth 90 mm
- max. recess depth 115 mm
- 2x female thread 1/2" connections
- Input 100-240V AC 50-60Hz
- concealed rough parts
- Output 350 mA SELV / Class 2
- Provided by customer: Light switch




Rain shower for surface-mounted ceiling installation with light 300 x 240 mm - SERIES SPECIFIC Chrome

28 042 980 Product version from 5/1/2022
mm [inches]

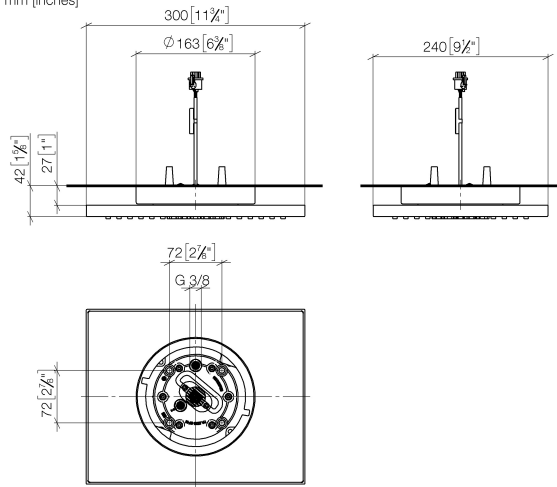

Flow rate chart

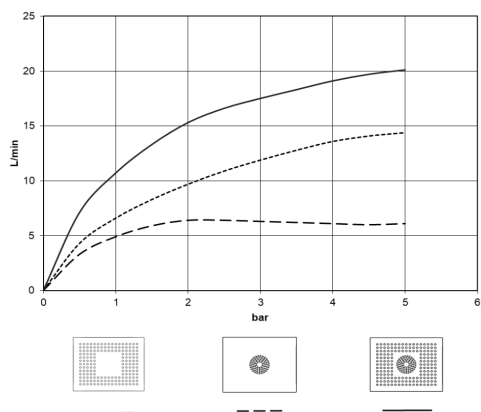

Codes & Standards

DIN 4109

ISO 3822

Scottish Water
Byelaws

UK Water Supply
Regulations

Ü-Zeichen



Rain shower for surface-mounted ceiling installation with light 300 x 240 mm - SERIES SPECIFIC
Chrome

28 042 980 Product version from 5/1/2022


Certificates and sustainability

LGA_38

WRAS_240502

Rain shower for surface-mounted ceiling installation with light 300 x 240 mm - SERIES SPECIFIC
Chrome

28 042 980 Product version from 5/1/2022

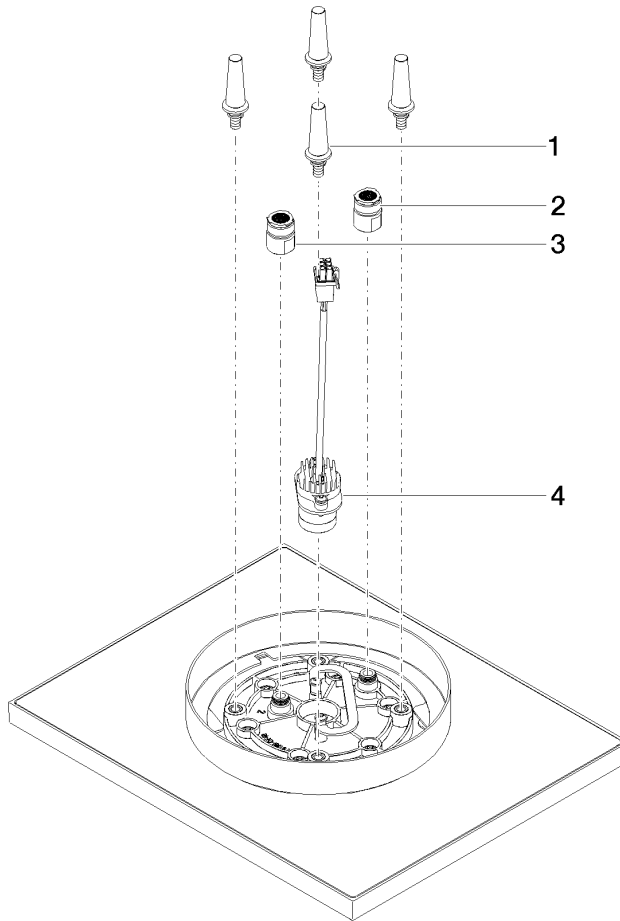

Spare parts list

No.	Item Number	Name	Quantity used	Delivery time
1	90 17 20 263 00 90	fixing set	1.00	2
4	90 10 01 225 00 90	electronic accessories	1.00	2
2	90 24 03 309 01 90	connection	1.00	2
3	90 24 03 309 00 90	connection	1.00	2