








36 501 977 Product version up to 2/2/2021



- cover plate Ø 124 mm
- temperature control handle with safety limit stop at 38°C
- thermostat cartridge
- WRAS

	Chrome	36 501 977-00
	Brushed Platinum	36 501 977-06
	Platinum	36 501 977-08
	Durabress (23kt Gold)	36 501 977-09
	Brushed Durabress (23kt Gold)	36 501 977-28
	Brushed Dark Brass (PVD)	36 501 977-39
	Brushed Dark Platinum	36 501 977-99

**Required miscellaneous**



**xTOOL Concealed thermostat module without volume control -** 35 503 970 90  
 •max. recess depth 110 mm  
 •min. recess depth 85 mm

**Recommended miscellaneous**



**xGRID Attachment set for integrating in the dry wall construction -** 12 340 970 90


**Required miscellaneous**




**xGRID Installation track 555 mm -** 12 360 970 90

36 501 977 Product version up to 2/2/2021

mm [inches]

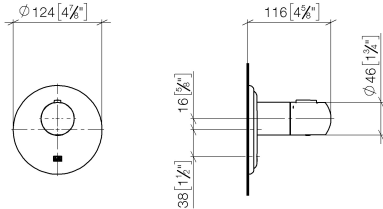

**Flow rate chart**

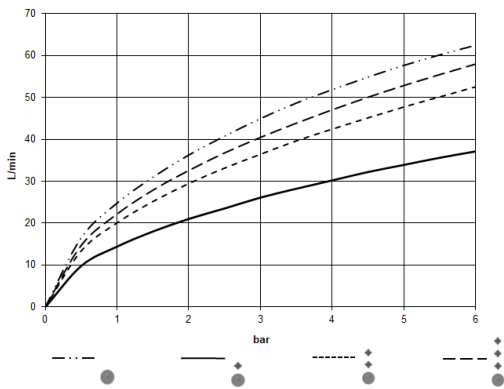

**Codes & Standards**

DIN 4109

EN 1111

ISO 3822

Scottish Water  
Byelaws

UK Water Supply  
Regulations

Ü-Zeichen



MADISON xTOOL Concealed thermostat without volume control 1/2" - Chrome

MADISON

36 501 977 Product version up to 2/2/2021

Certificates and sustainability


WRAS\_2011

LGA\_29

DVGW\_DW-  
6512DN0

LGA\_29

LGA\_29

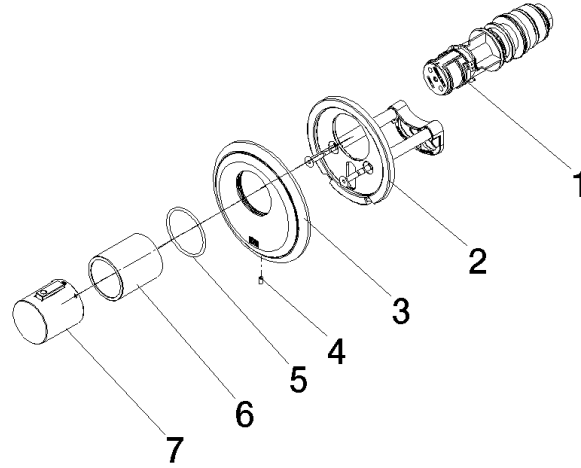

**Spare parts list**

No.	Item Number	Name	Quantity used	Delivery time
	2 90 11 01 196 00 90	base	1.00	2
	9 90 16 02 027 00 90	spring	1.00	2
	4 09 31 11 048 90	pin	1.00	2
	3 09 11 02 543-00	cover	1.00	10
	7 90 17 33 005 01-00	handle	1.00	10
	5 90 14 10 049 00 90	seal	1.00	2
	11 90 31 20 049 00-00	plug	1.00	10
	10 90 30 30 136 00 90	screw	1.00	2
	6 90 21 02 112 00-00	sleeve	1.00	10
	8 90 21 33 011 00-13	handle	1.00	2
	1 90 15 02 065 00 90	cartridge	1.00	2