


## CHARACTERISTICS

Wall-hung WC with concealed cistern  
Rimless bowl  
Soft close toilet seat and cover with quick release mechanism

<b>Dimensions</b>	560 x 369 x 406 (L x l x h en mm)		
<b>Weight</b>	25 kg		
<b>Materials</b>	Bowl	Ceramic	
	Toilet seat and cover	Thermosetting	
	Seal	Silicone	
	Remote control holder	Ceramic	
<b>Colors</b>			
<b>Fixing Height</b>	34,6 cm		
<b>For a seat height of</b>	47 cm		
<b>Water consumption</b>	2.5- and 4.5-liter tanks, up to 3 and 6 liters		
<b>Connections</b>	Electric connection	AC 220-240 V, 50/60 Hz	
	Maximal power	1400 W	
	Water connection	1/2-inch connector (15x21)	
<b>Warranty</b>	2 years		

## FEATURES

## Personalized hygiene

- ° Rear spray (50s): 5 levels of water temperature and intensity
- ° Front spray (50s): 5 levels of water temperature and intensity
- ° Oscillating spray that starts after 15s-use
- ° Nozzle positions: 5 positions
- ° 2 user profiles

## Absolute comfort

- ° Warm air drying: 5 levels of temperature
- ° Sleeping mode
- ° Auto-deodorization
- ° Led nightlight

## STANDARDS

## Compliant with PMR standards and current regulations

<b>Bowl</b>	<b>Bidet Module</b>
° NF EN 33: Connection dimensions	° CE Standard
° NF EN 997: Performance of toilet bowls	° UK CA Standard
° NF D12-101: Ceramics toilet bowls	
° NF 12-207: Durability of the soft-close hinge.	° EN 60335-1: Safety of household appliances
	° EN 60335-2-84: Safety of electronic bidets
	° EN 55014-1 / -2: Electromagnetic compatibility (EMC)
	° EN 61000-3-2/-3: Mains disturbances and interference
	° EN 1717: Backflow prevention (air gap type AB)

## MAINTENANCE

## Nozzle

The nozzle is automatically cleaned before and after each use. The nozzle can be removed for manual cleaning.

## Bidet Module

Run the descaling cycle **every six months** to ensure your toilet continues to work effectively over time. Replace the particle filter once a year.

## Hinges / Toilet seat and cover

Neutral Ph product: window cleaner, black soap, household alcohol, no abrasive sponge

**Avoid:** hydrochloric acid, ammonia, white vinegar, household acids, bleach.

## Bowl

Warm water and mild soap, use mild descaling products if necessary, and avoid any abrasive or highly acidic products.




## KIT CONTENT

## Included

- ° Bowl
- ° Fixing kit for support frame installation
- ° Toilet seat with soft-close hinge and quick release
- ° Remote control holder
- ° Remote control with CR2032 battery
- ° Particle filter

## Not included

- ° Flush plate
- ° Support frame

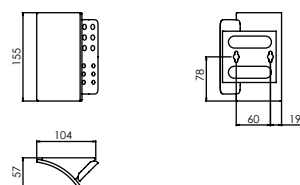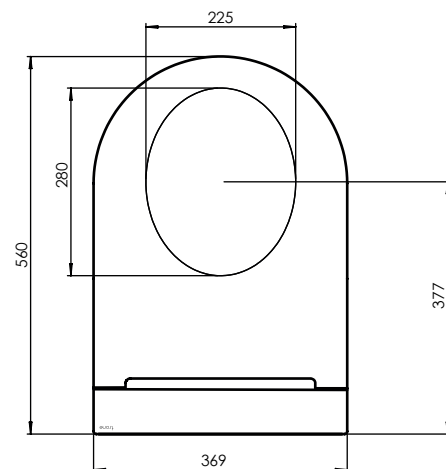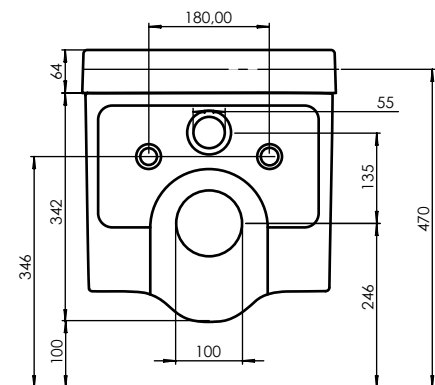

\*Our plans indicate all the necessary dimensions, taking into account standard tolerances. These dimensions are indicative. The exact dimensions can only be taken on the finished product.